



**ZHEJIANG REFINE WUFU AIR TOOLS CO.,LTD.**

MANUFACTURER & EXPORTER

• Factory Address: No. 100, Fugang Rd., Shangma Ind. Zone, Shitang Town,  
Wenling, Zhejiang Prov., 317513, China.

• I & E DEPARTMENT

Tel:0086-576-86911352 86917000 86913200 86917111

Fax:0086-576-86913578 86917006

Http://www.wufutools.com

Email:plg@wufutools.com



# GREASE INJECTOR

TRUSTED BY  
PROFESSIONALS  
SINCE 1979



**2024 CATALOGUE**





# ENTERPRISE HISTORY



ZHEJIANG REFINE WUFU AIR TOOLS CO.,LTD.(FORMER WENLING SHINIAN HARDWARE FACTORY) was set up in 1979. It's a professional air tools manufacturer in China which occupies an area of 66670 square meters with fixed assets valued USD 2.5 million. At present, it has more than 600 staffs, including with 80 engineers and technicians. The production capacity is about 12 million pieces per year.

WUFU are specialized in export of various of spray guns, pneumatic tools, water guns, air dusters, grease injectors and so on. Most of our products are exported to Europe, America, Asia, Australia etc. and we've won good reputation from our customers till now.

To ensure the stability and high quality of our products, WUFU owns more than 800 sets of professional machines such as CNC machines, CNC Machining centers and so on. All of WUFU products performs 100% test and AQL0.65

quality control during production. WUFU products also passed CE, GS, ROHS, PAHS,ETL, and ETL etc. and the factory had been approved ISO9001 quality management system certification. Through our effort, WUFU has created brands of "WUFU" and "PICASSO" etc. , which are well-known both in China and abroad.

WUFU has gained many honor titles during the past years. Such as good quality management awarded by the Agricultural Ministry, an enterprise of credit rating AAA, National High-tech Enterprise and designated as Zhejiang Enterprise Technology center etc. WUFU brand was awarded with ZHEJIANG and CHINA famous trademark.

We, as one of the first leading air tools manufacturers in China. With the aim of QUALITY IS FIRST, CUSTOMER IS SATISFIED, hope to cooperate with you to create great future together!

## IMAGE OF THE NEW FACTORY



Construction area: 58000m<sup>2</sup> Occupying area: 66670m<sup>2</sup>  
Located in the south-east of China, Wenling, Zhejiang  
4H from SHANGHAI by railway, 2H from WENZHOU airport by car  
2H from NINGBO airport by car, 1H from TAIZHOU airport by car



## RH-6451A

**AIR GREASE INJECTOR**  
**INDUSTRIAL GRADE**  
**HIGH EFFICIENCY, PORTABLE, DURABLE**

### Features

- ▶ Super strong of pump capacity, reaching up to 1.5L/min, ensuring high work efficiency.
- ▶ Grease pump with simple structure design, key components adopting engineering plastic. Easier for maintenance and long service life.
- ▶ Cylinder with integration process in CNC machining center, inside and outside with special oxidation surface treatment, high wear-resistant and durable.
- ▶ Steel pressure oil plate assembly designed in Pagoda structure, less residual grease oil in the barrel after running out of a barrel of oil which greatly improves the utilization rate of grease oil.
- ▶ Detachable filter net design, better filtering effect and easy for maintenance.
- ▶ Key sealings with imported material, key components with hard chrome plating treatment, high quality and long lifetime.







Grease recommended

Use lithium grease according seasons  
(Mix some engine oil before use)  
NLG 0#-1# (Winter)  
NLG 1#-2# (Spring & autumn)  
NLG 2#-3# (Summer)



Application

Ideal tool for professional grease lubricating for vehicles, engineering machinery, industrial equipments, etc.  
Widely applied in auto maintenance and repair industry, airport, workshop assembly line, grease changing center, etc.

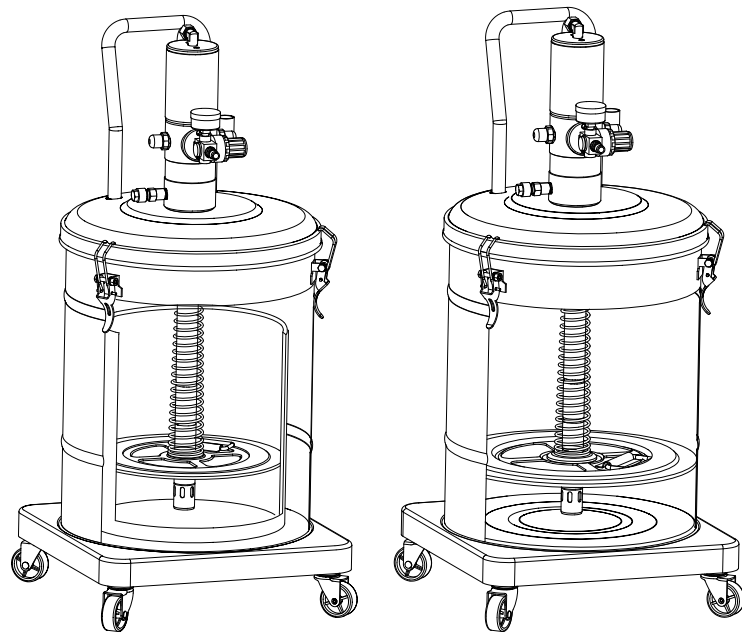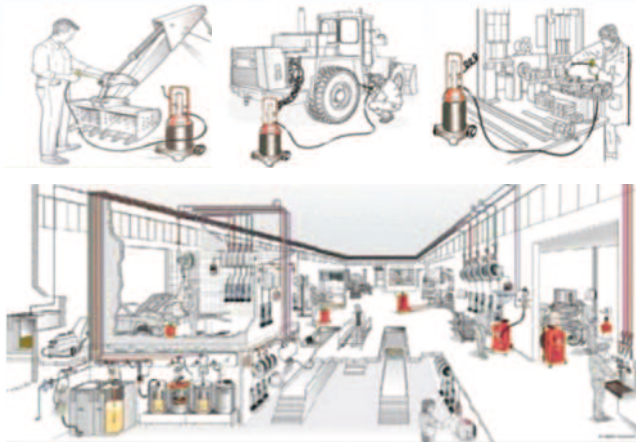

Standard barrel of grease  
can directly be put into the barrel

Bulk grease in the barrel



MODEL:RH2121-B

Compression Ratio	50:1
Air Pressure	6-8BAR,87-116PSI
Pump Capacity	0.85L/MIN
Outlet Pressure	300-400BAR,4350-5800PSI
Length of Connecting Pole	400(Standard size), 375,440,823mm available
Weight	5.0KGS
Box Size	680x150x150mm

Model	Length of Connecting Pole mm	Accessory In Barrel	Barrel Height and Diameter mm	Net Weight KGS	Gross Weight KGS	Box Size mm	QTY
RH-2121A	400	1pc pressure oil spring 1pc Ø219MM plastic pressure oil plate	330XØ220	12.50	13.50	360x320x840	20':289SETS 40':599SETS 40'HQ:661SETS
RH-7301	440	1pc pressure oil spring 1pc Ø325mm plastic pressure oil plate	430XØ315	17.00	18.00	365x365x840	20':250SETS 40':518SETS 40'HQ:572SETS
RH-5451D	375	1pc pressure oil spring 1pc Ø282mm plastic pressure oil plate	370XØ365	20.00	21.00	460x460x735	20':180SETS 40':373SETS 40'HQ:412SETS
RH-2451	440	1pc pressure oil spring 1pc Ø370 plastic pressure oil plate	430XØ355	17.50	18.50	400X400X840	20':208SETS 40':416SETS 40'HQ:476SETS

Each grease injector including 1pc HYQ200 sprayer and 1pc 4M x 6mm x 14.5mm high pressure rubber hose



12L BARREL  
CAPACITY

RH-2121A

30L BARREL  
CAPACITY

RH-7301

30L BARREL  
CAPACITY

RH-5451D

45L BARREL  
CAPACITY

RH-2451





MODEL:RH2121-DB

Compression Ratio	50:1
Air Pressure	6-8BAR,87-116PSI
Pump Capacity	0.85L/MIN
Outlet Pressure	300-400BAR,4350-5800PSI
Length of Connecting Pole	400(Standard size), 375,440mm available
Weight	4.00KGS
Box Size	680x150x150mm

Model	Length of Connecting Pole mm	Accessory In Barrel	Barrel Height and Diameter mm	Net Weight KGS	Gross Weight KGS	Box Size mm	QTY
RH-2121D	400	1pc pressure oil spring 1pc φ219mm plastic pressure oil plate	330XØ220	12.50	13.50	360x320x840	20':289SETS 40':599SETS 40'HQ:661SETS
RH-7201E	400	1pc pressure oil spring 1pc φ284mm plastic pressure oil plate	350XØ284	14.00	15.00	360x340x760	20':300SETS 40':634SETS 40'HQ:687SETS
RH-7201D	375	1pc pressure oil spring 1set φ282mm rubber and steel pressure oil plate assembly	370XØ365	13.50	14.50	415x415x745	20':181SETS 40':381SETS 40'HQ:414SETS
RH-5451F	440	1pc pressure oil spring 1set Ø325mm rubber and steel pressure oil plate assembly	430XØ315	15.50	16.50	365x365x840	20':250SETS 40':527SETS 40'HQ:570SETS

Each grease injector including 1pc HYQ200 sprayer and 1pc 4M x 6mm x 14.5mm high pressure rubber hose



12L BARREL CAPACITY

RH-2121D



20L BARREL CAPACITY

RH-7201E



30L BARREL CAPACITY

RH-7201D



30L BARREL CAPACITY

RH-5451F



MODEL:RH9201-B

Compression Ratio	50:1
Air Pressure	6-8BAR,87-116PSI
Pump Capacity	0.85L/MIN
Outlet Pressure	300-400BAR,4350-5800PSI
Length of Connecting Pole	400(Standard size), 440mm available
Weight	4.50KGS
Box Size	680x150x150mm

Model	Length of Connecting Pole mm	Accessory In Barrel	Barrel Height and Diameter mm	Net Weight KGS	Gross Weight KGS	Box Size mm	QTY
RH-9122	400	1pc pressure oil spring 1pc Ø219mm plastic pressure oil plate	316XØ220	12.50	13.50	360x360x810	20':270SETS 40':568SETS 40'HQ:617SETS
RH-9251	440	1pc pressure oil spring 1set Ø282mm rubber and steel pressure oil plate assembly	435XØ276	16.00	17.00	395x395x800	20':270SETS 40':568SETS 40'HQ:617SETS
RH-9301	440	1pc pressure oil spring 1set Ø325mm rubber and steel pressure oil plate assembly	430XØ315	16.00	17.00	365x365x855	20':245SETS 40':518SETS 40'HQ:560SETS
RH-9451	440	1pc pressure oil spring 1set φ360mm rubber and steel pressure oil plate assembly	430XØ355	17.50	18.50	400x400x855	20':208SETS 40':438SETS 40'HQ:476SETS

Each grease injector including 1pc HYQ200 sprayer and 1pc 4M x 6mm x 14.5mm high pressure rubber hose



12L BARREL CAPACITY

RH-9122



25L BARREL CAPACITY

RH-9251



30L BARREL CAPACITY

RH-9301



45L BARREL CAPACITY

RH-9451





MODEL:RH5451-GB

Compression Ratio	50:1
Air Pressure	6-8BAR,87-116PSI
Pump Capacity	0.85L/MIN
Outlet Pressure	300-400BAR,4350-5800PSI
Length of Connecting Pole	440mm available
Weight	7.00KGS
Box Size	160x160x845mm

Model	Length of Connecting Pole mm	Accessory In Barrel	Barrel Height and Diameter mm	Net Weight KGS	Gross Weight KGS	Box Size mm	QTY
RH-5301G	440	1pc pressure oil spring 1set Ø325mm rubber and steel pressure oil plate assembly	430XØ315	16.50	17.50	365x365x830	20':208SETS 40':438SETS 40'HQ:476SETS
RH-5451G	440	1pc pressure oil spring 1set Ø282mm rubber and steel pressure oil plate assembly	430XØ355	17.00	18.00	400x400x830	20':175SETS 40':518SETS 40'HQ:560SETS

Each grease injector including 1pc HYQ200 sprayer and 1pc 4M x 6mm x 14.5mm high pressure rubber hose



30L BARREL CAPACITY  
RH-5301G



45L BARREL CAPACITY  
RH-5451G



MODEL:RH1121-DB      MODEL:RH1121D

12L BARREL CAPACITY

MODEL:RH1121-DB

Compression Ratio	40:1
Air Pressure	6-8BAR,87-116PSI
Pump Capacity	0.75L/MIN
Outlet Pressure	240-320BAR,3480-4640PSI
Length of Connecting Pole	363MM(Standard size)
Weight	4.00KGS
Box Size	680x150x150mm

Model	Length of Connecting Pole mm	Accessory In Barrel	Barrel Height and Diameter mm	Net Weight KGS	Gross Weight KGS	Box Size mm	QTY
RH-1121D	363	1pc pressure oil spring 1pc Ø219mm plastic pressure oil plate	355XØ220	11.00	12.00	360x320x840	20':289SETS 40':599SETS 40'HQ:661SETS

Each grease injector including 1pc HYQ150 sprayer and 1pc 4M x 6mm x14.5mm high pressure rubber hose



MODEL:RH1121-B      MODEL:RH-1121

12L BARREL CAPACITY

MODEL:RH1121-B

Compression Ratio	40:1
Air Pressure	6-8BAR,87-116PSI
Pump Capacity	0.75L/MIN
Outlet Pressure	240-320BAR,3480-4640PSI
Length of Connecting Pole	363MM(Standard size)
Weight	4.50KGS
Box Size	680x150x150mm

Model	Length of Connecting Pole mm	Accessory In Barrel	Barrel Height and Diameter mm	Net Weight KGS	Gross Weight KGS	Box Size mm	QTY
RH-1121	363	1pc pressure oil spring 1pc Ø219mm plastic pressure oil plate	355XØ220	12.50	13.50	360x320x840	20':289SETS 40':599SETS 40'HQ:661SETS

Each grease injector including 1pc HYQ200 sprayer and 1pc 4M x 6mm x 14.5mm high pressure rubber hose





MODEL:RH5451-W2B

Compression Ratio	40:1
Air Pressure	6-8BAR,87-116PSI
Pump Capacity	1.2L/MIN
Outlet Pressure	240-320BAR,3480-4640PSI
Length of Connecting Pole	440mm(Standard size)505mm 823mm (Model:RH5451-A)
Weight	8.00KGS
Box Size	160X160X845mm

Model	Length of Connecting Pole mm	Accessory In Barrel	Barrel Height and Diameter mm	Net Weight KGS	Gross Weight KGS	Box Size mm	QTY
RH-5451W2	440	1pc pressure oil spring 1pc Ø282MM rubber and steel pressure oil plate assembly	430XØ355	20.50	21.50	445X445X880	20':160SETS 40':330SETS 40'HQ:370SETS
RH-5451W	440	Option 1:Not include spring or oil palte Option 2:Include 1pc pressure oil spring 1pc Ø282MM rubber and steel pressure oil plate assembly	430XØ355	20.00	21.00	400X400X860	20':150SETS 40':315SETS 40'HQ:342SETS
RH-5451	505	Option 1:Not include spring or oil palte Option 2:Include 1pc pressure oil spring 1pc Ø282MM rubber and steel pressure oil plate assembly	475XØ365	22.00	23.00	460X460X885	20':150SETS 40':315SETS 40'HQ:342SETS

Each grease injector including RH-5451W2 1pc HYQ250 sprayer 1pc 4Mx6mmx14.5mm high pressure rubber hose  
RH-5451W 1pc HYQ200 sprayer 1pc 4Mx6mmx14.5mm high pressure rubber hose  
RH-5451 1pcs HYQ300 sprayer 1pc 4Mx6mmx14.5mm high pressure rubber hose



MODEL:RH6451-AB

Compression Ratio	50:1
Air Pressure	6-8BAR,87-116PSI
Pump Capacity	1.5L/MIN
Outlet Pressure	300-400BAR,4350-5800PSI
Length of Connecting Pole	420MM(Standard size),400mm available
Weight	6.80KGS
Box Size	720X150X150mm

Model	Length of Connecting Pole mm	Accessory In Barrel	Barrel Height and Diameter mm	Net Weight KGS	Gross Weight KGS	Box Size mm	QTY
RH-6121	400	1pc φ219mm plastic pressure oil plate	330XØ220	14.00	15.00	360x320x840	20':290SETS 40':600SETS 40'HQ:660SETS
RH-6451C	420	1pc φ282mm plastic pressure oil plate	430XØ355	20.00	21.00	445x445x865	20':163SETS 40':340SETS 40'HQ:374SETS
RH-6451A	420	1pc φ282mm plastic pressure oil plate	430XØ355	20.00	21.00	400x400x865	20':202SETS 40':420SETS 40'HQ:462SETS

Each grease injector including 1pc HYQ250 sprayer and 1pc 4M x 6mm x14.5mm high pressure rubber hose







Features

It is characterized by safety, reliability, low air consumption, high working pressure, convenient use, high production efficiency, low labor intensity, and can be filled with various engine oils, diesel and other thinner fuels.

Application

It is widely used in automobile manufacturing, automobile repair and maintenance industry, oil change center, machining industry, manufacturing industry, yacht, mining and other industries.

MODEL:RH8201

Compression Ratio	5:1
Air Pressure	6-8BAR,87-116PSI
Pump Capacity	12-14L/MIN
Outlet Pressure	240-320BAR,3480-4640PSI
Length of Connecting Pole	975MM(Standard size)
Weight	8.50KGS
Box Size	150x150x1250mm

Each grease injector including 1pc XYQ-120 sprayer  
1pc 4M x 8mm x18mm high pressure rubber hose



25 L BARREL CAPACITY

MODEL:RH-8201A

Oil output	0.120kg/one stroke
Barrel height and diameter	410xΦ285
Net weight	7.50kg
Gross weight	8.50kg
Box Size	350x320x590mm



12 L BARREL CAPACITY  
RH-3121



12 L BARREL CAPACITY  
RH-4121



12 L BARREL CAPACITY  
RH-4121A



25 L BARREL CAPACITY  
RH-4201



25 L BARREL CAPACITY  
RH-4201A

Model	Oil Output	Accessory In Barrel	Barrel Height and Diameter mm	Net Weight KGS	Gross Weight KGS	Box Size mm	QTY
RH-3121	0.005kg/one stroke	1pc pressure oil spring 1pc Φ219mm plastic pressure oil plate	324XΦ219	14.00	15.00	400x360x530	20':367SETS 40':773SETS 40'HQ:838SETS
RH-4121	0.005kg/one stroke	1pc pressure oil spring 1pc Φ219mm plastic pressure oil plate	324XΦ219	9.00	10.00	370x300x630	20':367SETS 40':773SETS 40'HQ:838SETS
RH-4121A	0.005kg/one stroke	1pc pressure oil spring 1pc Φ219mm plastic pressure oil plate	324XΦ219	7.00	8.00	370x300x550	20':430SETS 40':903SETS 40'HQ:980SETS
RH-4201	0.005kg/one stroke	1pc pressure oil spring 1set Φ282mm rubber and steel pressure oil plate assembly	442XΦ276	13.00	14.00	400x400x590	20':490SETS 40':1035SETS 40'HQ:1123SETS
RH-4201A	0.008kg/one stroke	N/A	410XΦ285	8.00	9.00	350x320x590	20':423SETS 40':847SETS 40'HQ:968SETS

Each grease injector including 1pc grease gun and 1pc high pressure rubber hose.






## TROLLEY

### MODEL:RH-60



Capacity	20-60L
Box Size	Base support:550x165x505mm.Handle:900x180x160mm
Net Weight	9.00kg
Gross Weight	10.00kg

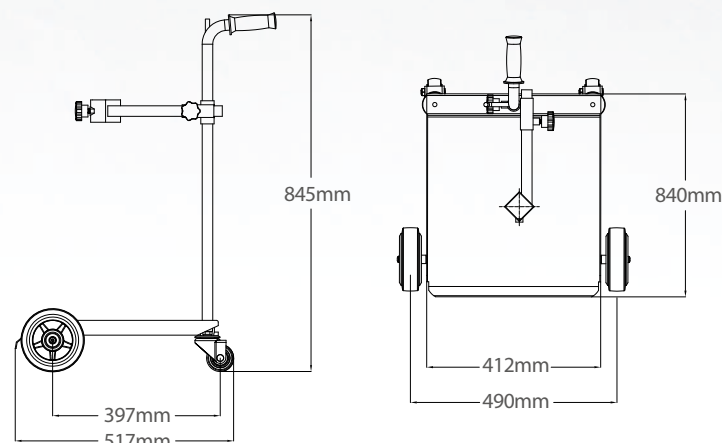

## TROLLEY

### MODEL:RH-200

Capacity	180-220L
Box Size	780x165x825mm
Net Weight	16.50kg
Gross Weight	17.50kg

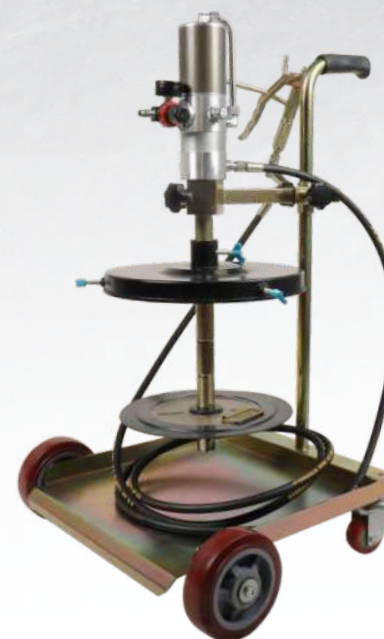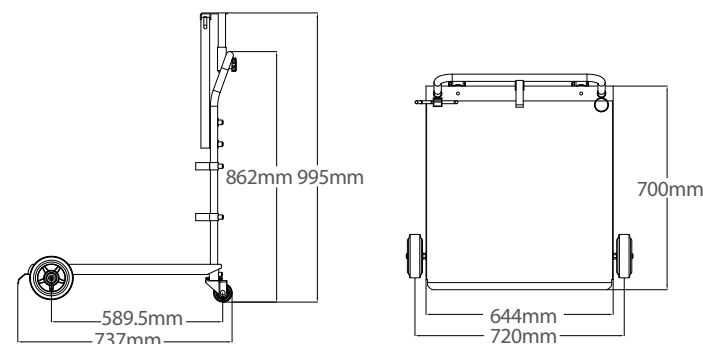

## Features

- Suitable for dispensing and lubricating grease in short and long distance
- Convenient use,high production efficiency

### MODEL:RH-60/B1

Including:

- 1pc trolley RH-60
- 1pc grease pump RH2121-B
- 1pc grease gun HYQ200
- 1pc Barrel cover Φ316mm
- 1pc Rubber and steel pressure oil plate Φ310mm
- 1pc 4m x 6mm x 14.5mm high pressure rubber hose

### MODEL: RH2121-B(PUMP MODEL NO)

Compression Ratio	50:1
Air Pressure	6-8BAR, 87-116PSI
Pump Capacity	0.85L/MIN
Outlet Pressure	300-400BAR, 4350-5800PSI
Length of Connecting Pole	440MM
Weight	5.0KG
Box Size	680 x 150 x 150mm



## Mobile Grease Distribution kit

### MODEL:RH-200/B2

Including:

- 1pc trolley RH-200
- 1pc grease pump RH2121-DB
- 1pc grease gun HYQ200
- 1pc Barrel cover Φ600mm
- 1pc Rubber and steel pressure oil plate Φ585mm
- 1pc 1pc 4m x 6mm x 14.5mm high pressure rubber hose

### MODEL: RH2121-DB (PUMP MODEL NO)

Compression Ratio	50:1
Air Pressure	6-8BAR, 87-116PSI
Pump Capacity	0.85L/MIN
Outlet Pressure	300-400BAR, 4350-5800PSI
Length of Connecting Pole	823MM
Weight	5.5KG
Box Size	1110X150X150mm



Model	Capacity	Net Weight	Gross Weight	Box Size	QTY
	L	KGS	KGS	mm	PCS
RH-60/B1	20-60	18.5	19.5	Pump+trolley handle box (size: 900x180x160mm) Rest cargo box (size:550x165x505mm)	20': 360SETS 40': 750SETS 40'HQ:890SETS
RH-200/B2	180-220	32	33	Pump+trolley handle box (size:1110x150x150mm) Rest cargo box (size:780x165x825mm)	20': 210SETS 40': 410SETS 40'HQ:480SETS



# ELECTRIC GREASE INJECTOR

Http:// www.wufutools.com

## Application

Ideal machine for lubrication of large machinery, excavators, mechanical equipment, trucks, agricultural equipment, etc.

## Features

- ▶ Four-cylinder benefits of small motor load and fast grease delivery.
- ▶ Industrial-grade copper wire motor makes longer life and have overheating power off, automatic protection.
- ▶ Real-time monitoring of battery storage capacity for easy work.
- ▶ With trolley and easy to move.



## MODEL:FJ-2211

Description	Four-cylinder cart type
Voltage	AC-220V
Working pressure	50Mpa
Power	600W
Grease	0-3#
Delivery	400g/min
Weight	17.5KGS
Box Size	360x340x470mm

**Each set including** 1pc 1.5 meters power cord  
1pc oil scraper  
1pc wrench  
1pc universal grease gun  
1pc 40CM spring hose  
1pc double-handle grease nozzle  
1pc 6meters high-pressure hose



## MODEL:FJ-1211

Description	Four-cylinder short barrel type
Voltage	24V
Working pressure	50Mpa
Power	450W
Grease	0-3#
Delivery	400g/min
Weight	17.0KGS
Box Size	370x340x500mm

**Each set including** 1pc 5 meters power cord  
1pc oil scraper  
1pc wrench  
1pc universal grease gun  
1pc 40CM spring hose  
1pc double-handle grease nozzle  
1pc voltage display  
1pc 6meters high-pressure hose



# ELECTRIC GREASE INJECTOR

Http:// www.wufutools.com

## Features


It is suitable for 13-18L butter bucket.  
It is recommended to use a 15L standard bucket.  
The inner diameter of the oil bucket is 260-300mm.



## MODEL:FJ-1200

Description	Twin-cylinder sunk type
Voltage	24V
Working pressure	50Mpa
Power	450W
Grease	0-3#
Delivery	360g/min
Weight	13.4KGS
Box Size	390x385x270mm

**Each set including** 1pc 5 meters power cord  
1pc oil scraper  
1pc wrench  
1pc universal grease gun  
1pc 40CM spring hose  
1pc double-handle grease nozzle  
1pc voltage display  
1pc pressure plate  
1pc 6meters high-pressure hose

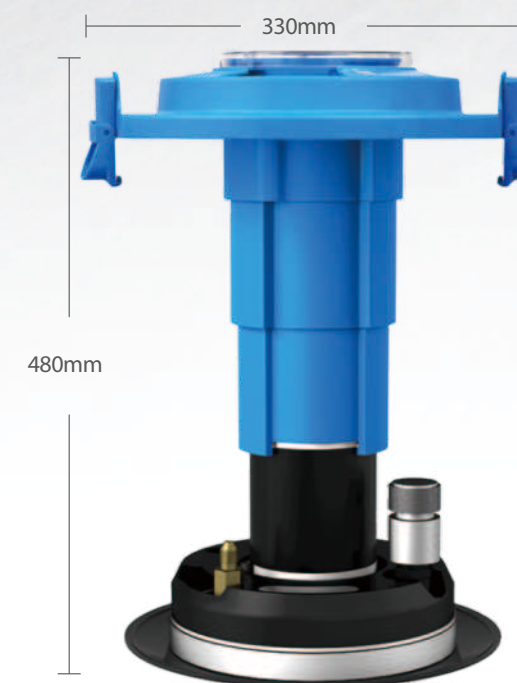

## MODEL:FJ-2201

Description	Four-cylinder sunk type
Voltage	AC-220V
Working pressure	50Mpa
Power	600W
Grease	0-3#
Delivery	400g/min
Weight	13.7KGS
Box Size	390x385x270mm

**Each set including** 1pc 5 meters power cord  
1pc oil scraper  
1pc wrench  
1pc universal grease gun  
1pc 40CM spring hose  
1pc double-handle grease nozzle  
1pc pressure plate  
1pc 6meters high-pressure hose





# ELECTRIC GREASE INJECTOR

Http:// www.wufutools.com

## Features


It is suitable for 13-18L butter bucket.  
It is recommended to use a 15L standard bucket.  
The inner diameter of the oil bucket is 260-300mm.

**13-18L**  
BARREL AVAILABLE

## MODEL:FJ-1201

Description	Four-cylinder sunk type
Voltage	24V
Working pressure	50Mpa
Power	450W
Grease	0-3#
Delivery	400g/min
Weight	13.7KGS
Box Size	390x385x270mm

**Each set including** 1pc 5 meters power cord  
1pc oil scraper  
1pc wrench  
1pc universal grease gun  
1pc 40CM spring hose  
1pc double-handle grease nozzle  
1pc voltage display  
1pc pressure plate  
1pc 6meters high-pressure hose

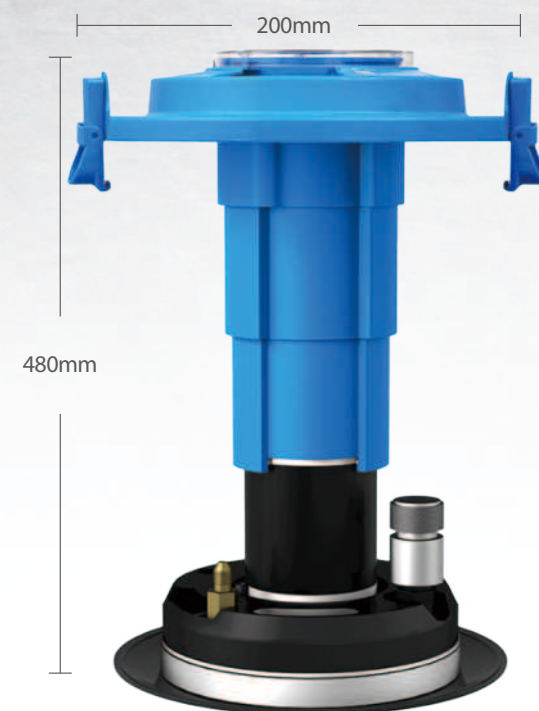

## MODEL:FJ-4223

Description	High-pressure automatic hose reel
Length	11.5m
Working pressure	≥50Mpa
Inner diameter	ø6mm(double-layer steel wire)
Outer diameter	ø14mm
Weight	14.1KGS
Box Size	400x200x410mm

# LITHIUM BATTERY GREASE GUN

Http:// www.wufutools.com

## Application


It is widely used in automobile manufacturing, automobile repair and maintenance industry, oil change center, machining industry, manufacturing industry, mining and other industries. Suitable for chain, bearing, gear and various mechanical equipment lubrication.

## Features

- Equipped with a brushless all-copper motor, 1 second grease delivery, low power consumption, strong power, low noise.
- The chain design in cartridge is more secure than the pull rod type, and the chain can be fixed on the tool's magnet which save space.
- Up to 16 cartridges of grease per charged battery.

## MODEL:FJ-1600Li

Description	Lithium Battery grease gun
Working pressure	21V
Max pressure	9000Psi
Grease	0-3#
Delivery	180g/min
Capacity	600cc
Weight	27KGS
Box Size	595x470x390mm 6PCS

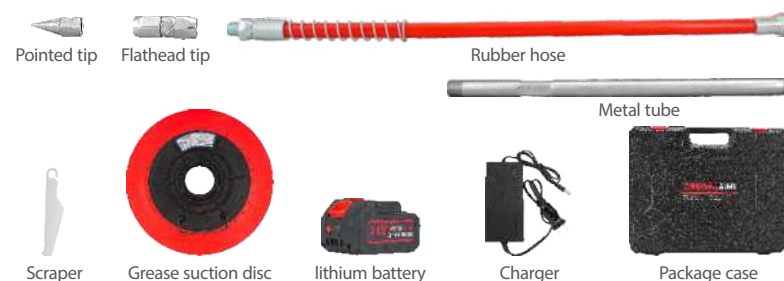

## Features

- 90° rotating handle, adapt to different scenarios.
- Two power supply modes: Lithium Battery & Storage battery directly.
- Up to 14 cartridges of grease per charged battery.

## MODEL:FJ-1620Li

Description	Lithium Battery grease gun
Working pressure	21V
Pressure resistance	9000Psi
Grease	0-3#
Delivery	120g/min
Capacity	600cc
Weight	31KGS
Box Size	600x490x320mm 6PCS





## Grease Gun



Model	Body material	Air valve material	Standard surface finish	Optional finish	Pressure(Mpa)	Box size
HYQ150	#45 steel	/	Zinc plated	Blackening, Nickel-plated, Chrome-plated	≤40	230x210x35mm
HYQ200	#45 steel	/	Zinc plated	Blackening, Nickel-plated, Chrome-plated	≤40	230x210x35mm
HYQ250	#45 steel	/	Zinc plated	Nickel-plated, polishing	≤40	270x250x40mm
HYQ300	ADC 12 Al	/	Chrome-plated	Nickel-plated, polishing	≤40	270x250x40mm
HYQ100	#20 steel	H59 Brass	Chrome-plated	Nickel-plated	≤25	/
XYQ120	#20 steel	H59 Brass	Chrome-plated	Nickel-plated	≤25	/

## Oil Plate

Different sizes and types of pressure oil plate optional for different models of grease injector:

A. Plastic plate: φ219mm, φ284mm,



B. Rubber-steel compound plate: φ282mm , φ310mm, φ325mm, φ360mm, φ370mm




C. Pagoda rubber-steel compound plate: 282mm,300mm,325mm,380mm



## High Pressure Grease Hose

Surface of high pressure hose twined by cloth. Standard length:4M. Optional length 2.5M (2.5M is suitable for hand-operated and foot-operated type). Standard length of gun hose: 300MM, Female and male thread connectors: on both ends.

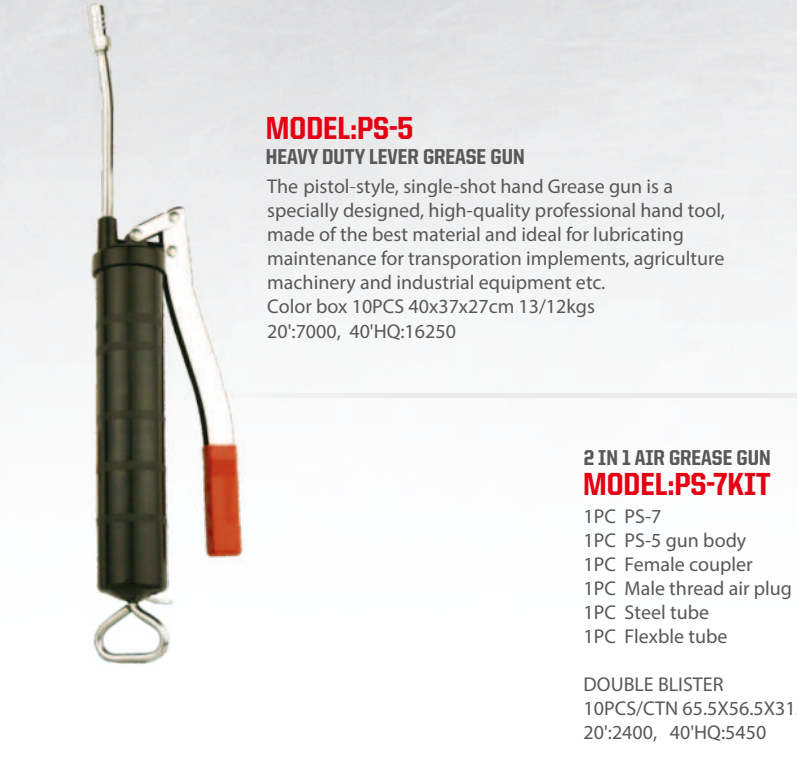

Including: 1pc extra flexible hose with nozzle for convenient operation on special areas.

## MODEL:PS-7

### AIR GREASE GUN

Epochal, innovative achievement for constructional improvment designed facility  
Fully automatic, cycles continuous grease flow with trigger depressed.  
Exclusive air piston design assures consistant priming  
Heavy-duty spring for prime retention

Air Pressure:30-90PSI  
Compression ratio: 1:30  
Air Inlet:1/4"

Capacity:400cc  
Color box 10PCS 40x37x37cm 14/13kgs  
20':5109, 40'HQ:11861

## MODEL:PS-7A

### CONTINUOUS PUMPING GREASE GUN

Ergonomic design for comfortable, easy operation.  
Fully automatic, cycles continuous grease flow with trigger pressed greatly improves greasing efficiency.  
Exclusive air piston design assures constant priming.  
Heavy-duty spring for prime retention.  
Suitable for greasing jobs in Auto maintenance, Hardware industry, and mechanical industry etc.

Working pressure : 30-120PSI  
Compression ratio: 1:45  
Air inlet: 1/4"  
Capacity: 400cc  
Color box 10PCS 40x37x37cm 14/13kgs  
20':5109, 40'HQ:11861